





Model:D20 (13Quarts)



Model:D30 (21Quarts)



Model:DA30 (21Quarts)

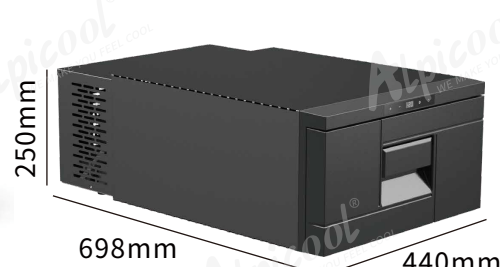

Features

- ❄️ FREEZES WITHOUT ICE: -4°F(-20°C) to 68°F(20°C)(D30/D30A)powerful chilling performance. (D20 temperature range:5°F(-15°C)to 68°F(20°C)
- ❄️ CAR BATTERY PROTECTION: With temperature memory function and three stages battery protection system prevents vehicle run out of battery.
- ❄️ Specific parts: Removable wire rack, digital display touch control panel, easy-lock door latch, protective foot pad, optional APP control.
- ❄️ High performance: Name brand compressor offers superior cooling experience.
- ❄️ Fit anywhere: Car/Jeep/Truck/Home/Dorm/Cottage/Garage/RV /Boat/Outdoor (DC/AC).
- ❄️ Rugged design: Shockproof and durable design for handling rocky road. Incline Operation up to 45°off level in short time.
- ❄️ Quiet operation: Less than 45db, like living in quiet suburb.
- ❄️ Adjustable Running Mode: Two different modes can be adjusted as needed (fast cooling/ energy saving).
- ❄️ Optional customized temperature detection hole to detect the interior temperature of the fridge.

* Refrigerators ≤40L have been authorized by Coca-Cola for production and sales in China.

MODEL:	D20	D30	DA30
TOTAL CAPACITY:	12L/13Quarts/0.42Cu.Ft.	20L/21Quarts/0.71Cu.Ft.	20L/21Quarts/0.71Cu.Ft.
POWER SUPPLY:	12/24V DC, 100-240V AC	12/24V DC, 100-240V AC	12/24V DC, 100-240V AC
RATED CURRENT:	DC 5.0A/2.5A AC 1.2A ~ 0.5A	DC 5.0A/2.5A AC 1.2A ~ 0.5A	DC 5.0A/2.5A AC 1.2A ~ 0.5A
POWER INPUT:	60W	60W	60W
PRODUCT DIMENSIONS: (L x W x H inch)	440*555*250mm 17 5/16*21 7/8*9 7/8inch	440*698*250mm 17 5/16*27 1/2*9 7/8inch	440*698*250mm 17 5/16*27 1/2*9 7/8inch
PACKING SIZE (D x W x H in):	512*630*314mm 20 3/16*24 13/16*12 3/8inch	508*780*318mm 20*30 3/4*12 9/16inch	508*780*318mm 20*30 3/4*12 9/16inch
NET WEIGHT:	16.8kg/37.03lbs	17.4kg/38.36lbs	17.4kg/38.36lbs
GROSS WEIGHT:	18.3kg/40.34lbs	18.9kg/41.67lbs	18.9kg/41.67lbs
FRIDGE/FREEZER (COMBINATION):	-15~20°C (5~68°F)	-20~20°C (-4~68°F)	-20~20°C (-4~68°F)
FCL QUANTITY:	280/581/664(20'/40'/40'HQ)	224/476/544 (20'/40'/40'HQ)	224/476/544 (20'/40'/40'HQ)
NOISE LEVEL:	<45dB	<45dB	<45dB

*Affected by factors such as ambient temperature, there is a temperature difference of about 3 °C.



LED touch control panel



Easy-lock door latch




Vent cover



Removable drawer



Car/home use

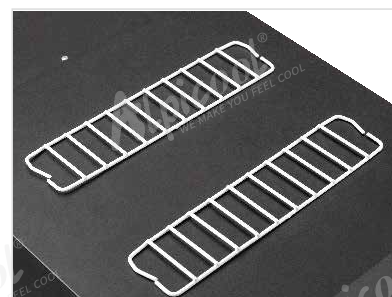

Flexible wire rack



Secure door lock system




Fat foam insulation



Solid outer casing(steel)




OVERVIEW:

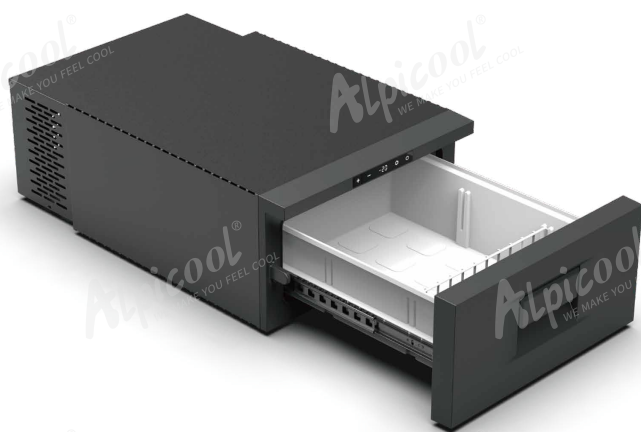

- ❄ Fully open drawer for easy access to items.
- ❄ Flexible wire rack, for classified storage.

ACCESSORIES(optional):

For example:

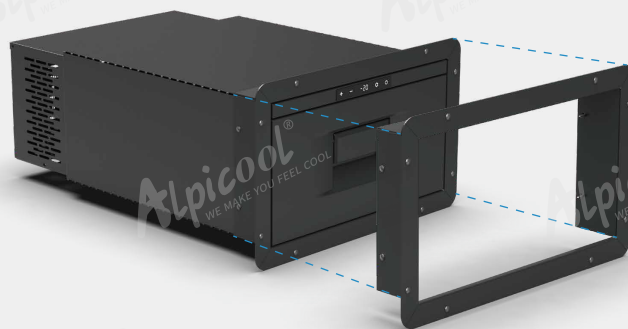

Installation frame